

## ESO Phase 3 Data Release Description

|                         |   |
|-------------------------|---|
| <b>Data Collection</b>  | XSHOOTER_ECHELLE  |
| <b>Release Number</b>   | 1   |
| <b>Data Provider</b>    | ESO, Quality Control Group  |
| <b>Document Date</b>    | <18.07.2016>  |
| <b>Document version</b> | 1.4   |
| <b>Document Author</b>  | Reinhard Hanuschik  |
| <b>On-line version</b>  | <a href="http://www.eso.org/qc/PHOENIX/XSHOOTER/processing.html">http://www.eso.org/qc/PHOENIX/XSHOOTER/processing.html</a> |

### **Changes with respect to the earlier version:**

- *new observing mode MAPPING: handled like STARE*
- *reference to calSelector service for telluric product files added*
- *intensity jump at 2.25 micron documented*

## Abstract

This is the release of reduced 1D spectra from the XSHOOTER<sup>1</sup> spectrograph, ECHELLE (SLIT) mode (as opposed to the IFU mode). All spectra have been reduced under the assumption of point-like sources. This release is an open stream release, it includes so far archived XSHOOTER data and will be continued into the future. The processing scheme is as homogeneous as possible.

The selected data cover the vast majority of the entire XSHOOTER data archive, from the begin of operations in October 2009 until present. The data have been reduced with the XSHOOTER pipeline, version xshoo-2.3 and higher. All data have their instrument signature removed: they have been de-biased, flat-fielded, wavelength-calibrated, order-merged, extracted, sky-subtracted and finally flux-calibrated. Telluric absorption has *not* been corrected for. The pipeline output products come in the ESO 1D standard binary table<sup>2</sup>, along with some ancillary files.

The processing is performed by the Quality Control Group in an automated process. The pipeline processing uses the archived, closest-in-time, quality-controlled, and certified master calibrations. It is important to note that the reduction process itself is automatic, while the quality assessment and certification of the master calibrations was (and still is) human-supervised. The overall data content will grow with time as new data are being acquired and processed (approximately with monthly cadence and with a delay of 1 or 2 months).

The data format follows the ESO 1D spectroscopic standard<sup>2</sup> for phase-3 data products. Each spectrum is a multi-column binary table. There is one product file for each set of input raw files. The set of input raw files is template-based for the NODDING and OFFSET data, and file-based for STARE data. The XSHOOTER products always come per arm: UVB, VIS, or NIR.

This data release offers science-grade data products, with the instrumental signature and sky background removed, flux-calibrated, with error estimates and quality flags, and with a list of known shortcomings. They are considered to be ready for scientific analysis. They are expected to be useful for any kind of medium-to-high resolution spectroscopic research, including abundance and line profile studies, and radial velocity studies. For studies of energy dis-

---

<sup>1</sup> <http://www.eso.org/sci/facilities/paranal/instruments/xshooter.html>

<sup>2</sup> <http://www.eso.org/sci/observing/phase3/p3sdpstd.pdf>

tributions the researcher should keep in mind that the XSHOOTER instrument is a medium-to-high resolution spectrograph, designed for stability and throughput. It is usually not operated to achieve high-precision spectrophotometry, unless the wide slit is used. Slit losses have to be expected, and they may differ from arm to arm. There has been no attempt to correct for telluric absorption lines; this might affect certain science applications.

**Disclaimer.** Data have been pipeline-processed with the best available calibration data. However, please note that the adopted reduction strategy may not be optimal for the original scientific purpose of the observations, nor for the scientific goal of the archive user.

You may also want to consult the [on-line version of this documentation](#)<sup>3</sup> which is a living document and has further useful links and more details.

## Release Content

The XSHOOTER\_ECHELLE release is a stream release. The overall data content is not fixed but grows with time as new data are being acquired and processed. The data are tagged as "XSHOOTER\_ECHELLE" in the ESO archive user interface<sup>4</sup>.

The first data were published under XSHOOTER\_ECHELLE in May 2014, with XSHOOTER data from the begin of operations (October 2009) until the end of 2013. The archive is being filled chronologically. New data are being added at roughly monthly intervals and with a delay of 1 or 2 months, when all master calibrations for the corresponding time interval are available.

## How to organize

The downloaded data come with their technical archive names:

| Filename                         | Status    | Progress                                      |
|----------------------------------|-----------|---|
| ADP.2014-05-08T10_27_00.590.fits | Completed | 100% - 105.9KB of 105.9KB, 244.7KB/s          |
| ADP.2014-05-08T10_27_00.610.txt  | Completed | 100% - 370.0bytes of 370.0bytes, 221.0bytes/s |
| ADP.2014-05-08T10_27_00.677.fits | Completed | 100% - 10.1MB of 10.1MB, 5.1MB/s              |
| ADP.2014-05-08T10_27_00.830.png  | Completed | 100% - 142.0KB of 142.0KB, 85.3KB/s           |
| ADP.2014-05-08T10_27_00.630.fits | Completed | 100% - 27.9MB of 27.9MB, 15.2MB/s             |
| ADP.2014-05-08T10_27_00.723.png  | Completed | 100% - 136.6KB of 136.6KB, 70.5KB/s           |
| ADP.2014-05-08T10_27_00.743.png  | Completed | 100% - 63.8KB of 63.8KB, 37.8KB/s             |
| ADP.2014-05-08T10_27_00.930.txt  | Completed | 100% - 370.0bytes of 370.0bytes, 211.0bytes/s |
| ADP.2014-05-08T10_27_00.993.fits | Completed | 100% - 1.3MB of 1.3MB, 646.3KB/s              |
| ADP.2014-05-08T10_27_00.510.txt  | Completed | 100% - 370.0bytes of 370.0bytes, 189.0bytes/s |
| ADP.2014-05-08T10_27_00.550.fits | Completed | 100% - 14.8MB of 14.8MB, 5.3MB/s              |
| ADP.2014-05-08T10_27_00.737.fits | Completed | 100% - 1.3MB of 1.3MB, 1.4MB/s                |
| ADP.2014-05-08T10_27_00.803.png  | Completed | 100% - 156.3KB of 156.3KB, 80.1KB/s           |
| ADP.2014-05-08T10_27_00.457.fits | Completed | 100% - 21.6MB of 21.6MB, 13.8MB/s             |
| ADP.2014-05-08T10_27_00.583.txt  | Completed | 100% - 370.0bytes of 370.0bytes, 235.0bytes/s |
| ADP.2014-05-08T10_27_01.007.png  | Completed | 100% - 149.3KB of 149.3KB, 73.0KB/s           |
| ADP.2014-05-08T10_27_01.077.fits | Completed | 100% - 1.3MB of 1.3MB, 752.3KB/s              |
| ADP.2014-05-08T10_27_00.563.fits | Completed | 100% - 19.0MB of 19.0MB, 7.0MB/s              |
| ADP.2014-05-08T10_27_00.697.png  | Completed | 100% - 68.5KB of 68.5KB, 44.1KB/s             |
| ADP.2014-05-08T10_27_00.837.fits | Completed | 100% - 1.3MB of 1.3MB, 791.0KB/s              |
| ADP.2014-05-08T10_27_00.890.png  | Completed | 100% - 139.6KB of 139.6KB, 152.5KB/s          |
| ADP.2014-05-08T10_27_00.897.txt  | Completed | 100% - 370.0bytes of 370.0bytes, 244.0bytes/s |
| README_111717.txt                | Completed | 100% - 3.4KB of 3.4KB, 4.0KB/s                |

Speed: 0.0bytes/s | Completed 27 of 27 files, failed 0 | 115.5MB of 115.5MB  
Conc. Downloads 1.5

Figure 1. List of downloaded files on the ESO Download Manager

The first useful step to do is the organization of the data on the local disk. The README file

<sup>3</sup> <http://www.eso.org/qc/PHOENIX/XSHOOTER/processing.html>

<sup>4</sup> [http://archive.eso.org/wdb/wdb/adp/phase3\\_spectral/form](http://archive.eso.org/wdb/wdb/adp/phase3_spectral/form)

coming with every download contains the information necessary to properly rename the files and establish their association. The fundamental unit of the renaming process is to capture column #2 in the README file (technical name starting with ADP) and column #3 (original name, starting either with XS\_ for the fits and txt files, or with r.XSHOO/r.SHOO for the graphics) and use something like 'mv \$2 \$3'. The file type is in column #4, find the possible values listed in Table 6. The spectral product is of type SCIENCE.SPECTRUM while the other files are of type ANCILLARY.<subtype>. Once you have renamed the files, they carry the names as also listed in the ASSON1, ASSON2 etc. header keys of the first extension of the file. See further down for a description of the file types and their content.

Then, the easiest way to identify all files belonging together is the timestamp in their name, e.g. 2009-10-05T07:45:26.840, which is common to all file names belonging together.

## Data Selection

Data selection is entirely rule-based. It is organized along the following criteria:

- instrument=XSHOOTER (or SHOOT as used until March 2010);
- observing technique (DPR.TECH) = ECHELLE,SLIT,<obsmode> with obsmode being one of STARE, NODDING, MAPPING<sup>5</sup> or OFFSET (**not**: ECHELLE,IFU);
- category (DPR.CATG) = SCIENCE;
- type (DPR.TYPE) = OBJECT.

No selection is made on the basis of the observing mode (visitor or service), nor on settings. XSHOOTER ECHELLE settings are defined by the combination of arm (UVB, VIS, or NIR), binning (1x1, 1x2, or 2x2), and slit width.

We have processed only those science data for which certified master calibrations exist in the archive. Depending on their type, these master calibrations exist at daily frequency or less. They were all processed by the Quality Control Group but earlier in time, close to the date of acquisition, in order to provide quality feedback to the Observatory. All master calibrations used here were certified, meaning checked for quality and proper registration of instrument effects. For XSHOOTER, the selection pattern for master calibrations was complete from the begin of operations on, covering both Service Mode (SM) and Visitor Mode (VM) science data and all settings.

Note that the fact that a certain set of XSHOOTER raw files does not have a product in this release does not necessarily imply a quality issue with the raw data. There are sometimes acquisition patterns for which the processing jobs can be predicted to fail (e.g. NODDING with one raw file; see “Rejected or failed processing” below). In some of those cases the raw data would probably process fine with a fine-tuned strategy.

In general, the master calibrations were processed with different (earlier) pipeline versions than the science data in this stream. The most significant change in the XSHOOTER pipeline was related to version xshoo-2.0 and higher, reflecting the results of a major science-grade review in 2012 and 2013. This change was implemented in 2013-01. All science data acquired later than that date have been processed with essentially the same pipeline version as their master calibrations. All science data acquired earlier have still been processed with the current pipeline version but their master calibrations were processed with earlier versions. See

---

<sup>5</sup> The observing mode MAPPING was introduced in December 2015.

“Master calibrations” below for a discussion of the main differences.

Science data with the PROG.ID starting with 60. or 060. have been de-selected, considering them as test data. Data taken at daytime (with obviously wrong ‘SCIENCE’ tag) have been ignored. Otherwise the header tag ‘SCIENCE’ has been blindly accepted from the raw data (originally defined by the PI), thus including sometimes standard stars intended by the PI for use as flux calibrator but labeled wrongly. This is often evident from the OBJECT header key. Also, there are rare cases when test observations were executed under the SCIENCE label. Some very short exposures with no signal fall into that category but have not been suppressed.

All data have been processed up to the flux calibration step. The flux calibration was done with master response curves.

There is no raw science data selection based on quality. Likewise, we have not considered OB grades<sup>6</sup>: the observations might have any grade between A and D (if taken in SM), or X (in VM). The availability, or non-availability, of a particular file in this release does not infer any claim about the data quality.

For the observing modes NODDING and OFFSET, we have combined all raw files taken in one template and from one arm in a single product file. Note that we have combined only within a template; multiple observations of the same OB, or observations across OBs, *have not been co-added*. In the automatic quality checks of the products, we have flagged those rare cases when a template was aborted and an additional quality issue occurred (see section ‘Data Quality’).

For observing mode STARE, we have processed every single input raw file separately. While processing of STARE data could also be done with all files from a single template stacked together, it is not always reasonable to do so, since there might be cases when the template sequence was designed to follow a time variability pattern. Since it is impossible to automatically recognize this case this case, it was decided to process the STARE data always one by one. A manual co-addition or stacking of these products by the user is straightforward. The same is true for the observing mode MAPPING which was introduced in December 2015: we process the data file by file, like in the case of STARE. We do not stack since we do not know the exact observing strategy.

## Release Notes

Depending on the observing mode, the data reduction uses the standard XSHOOTER pipeline recipes `xsh_scired_slit_stare`, `xsh_scired_slit_nod` or `xsh_scired_slit_offset`. Find a description of these science recipes in the Pipeline User Manual<sup>7</sup>.

Find the pipeline version used for processing in the header of the product file, under “HIERARCH ESO PRO REC1 PIPE ID”, or in the QC database, key `pipe_id`. The version for the initial dataset (the historical batch until 2013-12-31) was `xshoo/2.3.12dev1` (despite its name, this was a stable version).

---

<sup>6</sup> As given by the observatory staff to assess the match with user-defined constraints, for SM data.

<sup>7</sup> Under the XSHOOTER link in <http://www.eso.org/sci/software/pipelines/>. There you will also find the link to the Reflex tutorial, the current version is under ‘XSHOOTER Reflex Tutorial’.

All recipe parameters, including the extraction methods, were set by the pipeline defaults. The only exceptions are purely technical<sup>8</sup>. Find more details in the User Manual, sections 10.15-10.17 (for version 12.1).

## Pipeline Description

Information about the XSHOOTER pipeline (including downloads and manual) can be found under the URL <http://www.eso.org/sci/software/pipelines/>. The QC pages<sup>9</sup> contain information about the XSHOOTER data, their reduction and the pipeline recipes.

## Data Reduction and Calibration

The main reduction steps of the XSHOOTER Echelle science data are the following:

**STARE and MAPPING observations.** Each STARE frame is reduced individually; multiple STARE observations from the same template are not stacked. Reduction steps are:

- The input spectrum gets bias-corrected (UVB and VIS arm), or dark-corrected (NIR arm).
- Cosmic rays are detected on the input spectrum using Laplacian edge detection.
- The order table is used to locate the inter-order regions where the background is fit with a polynomial, which is then subtracted from the science data.
- The master flat frame is divided into the science frame.
- The sky background is subtracted (`sky-subtract=TRUE`, `sky-method=MEDIAN`).
- The science frame is rectified order by order.
- The spectrum is localized (`localize-method=MANUAL`). A simple sum extraction is done on the 2D rectified orders. No optimal extraction was performed (although the pipeline offers it) since it has artefacts.
- The extracted 1D orders are merged into a single spectrum.
- The spectrum is finally flux calibrated using a *master response curve*.

The localization was done with the method `MANUAL` (`localize-slit-position=0.0`, `localize-slit-hheight=2.0`). It is the most robust method but not always the correct one (if the object is off-centre). The position of the peak signal can easily be checked on the preview plot #2 (for VIS arm data).

**NODDING observations.** They get combined within the same template, per arm; the pipeline assumes constant transparency and equal exposure times for all input frames. Reduction steps are:

- All input spectra are bias-corrected (UVB and VIS arm). N input frames are combined (alternating: object top, object bottom) where N must be even.
- Cosmic rays are detected on each input spectrum using Laplacian edge detection.
- The recipe combines the science frames taken at the same position (if e.g. sequence was AA BB, data are combined as A B) doing median stacking (`stack-method=median`).
- Pairs are subtracted (e.g. A-B).
- The master flat frame is divided into each subtracted science frame pair.
- Each science frame pair is rectified order by order.
- Since `correct-sky-by-median=TRUE`, the recipe calculates and subtracts the median pixel value for each wavelength column in the rectified frame from the column pixel values.

---

<sup>8</sup> Namely: `generate-SDP-format=TRUE` (to generate the output format of the spectra), and `dummy-association-keys=4` for the technical ASSOC/ASSON keys.

<sup>9</sup> [http://www.eso.org/qc/XSHOOTER/pipeline/pipe\\_gen.html](http://www.eso.org/qc/XSHOOTER/pipeline/pipe_gen.html)

- For each subtracted science frame pair, the recipe forms [(A-B) – shifted (B-A)] and then combines them using `combinenod-method=MEAN`.
- The standard extraction method is used to extract the spectrum (`extract-method=NOD`).
- The extracted 1D orders are merged into a single spectrum.
- The spectrum is finally flux calibrated using a *master response curve*.

Note that in case of odd number of input files, the pipeline *rejects the last one* and processes all others. Nodding with one input frame always fails.

**OFFSET observations.** SKY and OBJECT frames get combined within the same template, per arm; the pipeline assumes constant transparency and sky brightness, and equal exposure times for all input frames. Reduction steps are:

- Cosmic rays are detected on each input frame using Laplacian edge detection.
- SKY frames are subtracted from OBJECT frames in pairs.
- The master flat frame is divided into each sky-subtracted science frame.
- Each sky-subtracted science frame is rectified order by order.
- The rectified science frames are stacked (`combinenod-method=MEAN`).
- The standard extraction method is used to extract the spectrum.
- The extracted 1D orders are merged into a single spectrum.
- The spectrum is finally flux calibrated using a *master response curve*.

#### Master Calibrations used for data reduction<sup>10</sup>

Table 1. Set of master calibrations used for data reduction

| Type* (pro.catg)                                       | name (first part)  | Mandatory **/ optional          | content  |
|--|--------------------|---------------------------------|--|
| MASTER_BIAS_<arm1>                                     | XS_MBIA            | optional (but always provided)  | master bias: created from 5 raw bias frames; removes bias level and bias structure.  |
| MASTER_DARK_NIR  | XS_MDRK            | optional (mandatory for STARE)  | master dark: created from 1 or 3 raw dark frames; removes dark level and dark structure.   |
| ORDER_TAB_EDGES_SLIT_<arm><br>ORDER_TAB_AFC_SLIT_<arm> | XS_POES<br>XS_POTA | mandatory optional, in addition | table with traces of order edges same, corrected for flexure   |
| MASTER_FLAT_SLIT_<arm>                                 | XS_MFSL            | mandatory                       | master flat: created from 5 (VIS) or 10 (UVB, NIR) raw flats; used for: defining order edges, removing gain noise, blaze function, slit noise; introducing lamp energy distribution. In UVB, two lamps are used, a D2 and a quartz lamp. |
| DISP_TAB_<arm><br>DISP_TAB_AFC_<arm>                   | XS_PDT2<br>XS_PDTA | optional optional, in addition  | dispersion table same, corrected for flexure   |

<sup>10</sup> Please check Sect. 7 of the Pipeline User Manual for the description of calibration data.

| Type* (pro.catg)   | name (first part)  | Mandatory **/ optional                | content  |
|--|--------------------|---------------------------------------|--|
| XSH_MOD_CFG_OPT_2D_<arm><br>XSH_MOD_CFG_OPT_AFC_<arm><br>> | XS_PMC2<br>XS_PMCA | mandatory<br>optional, in<br>addition | physical model configuration<br>file<br>same, corrected for flexure.   |
| SPECTRAL_FORMAT_TAB_<arm>                                  | XS_GSFT            | mandatory                             | Static spectral format table   |
| BP_MAP_RP_<arm>  | XS_GBPM            | optional<br>(but always<br>provided)  | Static bad pixel map   |
| MRESPONSE_MERGE1D_SLIT_<arm>                               | XS_MRSP            | optional<br>(but always<br>provided)  | Static response curve used for<br>flux calibration; derived from<br>selected sets of standard star<br>measurements; removes<br>lamp response and remaining<br>instrument signature |
| ATMOS_EXT_<arm>  | XS_GEXT            | optional<br>(but always<br>provided)  | Static table with atmospheric<br>extinction  |
| SKY_LINE_LIST_<arm>  | XS_GSLL            | optional<br>(for STARE<br>mode)       | static table with sky line<br>positions  |

\* arm1 = UVB or VIS; arm = UVB|VIS|NIR

\*\* if missing, pipeline would fail

**Flux calibration** (all three modes). For the flux calibration there were initially two options: for almost every night used for XSHOOTER science, there exists a flux standard measurement. On the other hand XSHOOTER is neither designed for, nor operated under strictly photometric conditions, and for that reason the flux calibration cannot aim at photometric accuracy, but instead at removing the remaining instrumental signature (mainly from the spectral energy distribution of the flat lamp). For this purpose master response curves are sufficient, which are carefully compiled from individual (nightly) response curves, giving an accuracy of the flux scale in the science products of about +/- 10% differentially (meaning the instrumental effects are removed with that accuracy). Still the photometry could be off by larger amounts, due to uncontrolled transparency variations and slit losses. See below for a discussion of the way the master response curves were constructed.

**Wavelength scale.** The XSHOOTER Echelle products are wavelength calibrated. The wavelength scale is topocentric; no corrections for barycentric or heliocentric motion have been applied. The corresponding values have been calculated by the pipeline and are stored in the header (HIERARCH.ESO.QC.VRAD.BARYCOR and ...HELICOR, in km/s).

**Telluric absorption.** No correction for telluric absorption lines has been applied, although for almost all products one or more telluric standard stars have been measured, within 2 hours of the observation and within 0.1 in airmass. The telluric correction is not provided by the pipeline because it requires some assumptions on the science spectrum. The user may want to download the telluric standard stars from the ESO archive through the calSelector service where the user might prefer to retrieve the already processed master files and apply them to the science spectra. Alternatively, users may want to visit the ESO *skytools* web page<sup>11</sup> for appropriate tools.

<sup>11</sup> <http://www.eso.org/sci/software/pipelines/skytools/>

**Bad pixel map.** We used *static* bad pixel maps for the processing, selected per arm and binning<sup>12</sup>. These are from 2013 and have been carefully reviewed for the pipeline versions xshoo-2.x.

**Normal daytime calibrations and AFC frames** (automatic flexure compensation). During the lifetime of XSHOOTER three different association schemes were used for ORDER\_EDGE, DISP\_TAB, and XSH\_MOD\_CFG\_OPT master calibrations:

- **2009-10-01 ... 2011-03-08:** the products from the daytime calibrations have been taken, i.e. no AFC data (cf. Table 1).
- **2011-03-09 ... 2012-06-30:** only the products from the AFC frames (XS\_POTA, XS\_PDTA, XS\_PMCA) have been used.
- **2012-06-30 ... now:** products from both daytime calibrations and AFC frames are associated.

A careful investigation of the shifts in X and Y direction to be compensated has shown that an effective difference in quality was not noticeable. Hence we have decided to keep the historical association scheme and process the data accordingly.

**Master calibration names and recipe parameters used for reduction.** The product header contains a list of all used master calibrations, look for keys "HIERARCH ESO PRO REC1 CAL<n> NAME" and "... CATG", with the index n. The pipeline parameters and their values are listed as "HIERARCH ESO PRO REC1 PARAM<n> NAME" and "... VALUE".

**Products.** The XSHOOTER pipeline creates a large number of intermediate and final product files. The final product in the spectroscopic data format combines information from the following products:

- extracted spectrum (de-biassed, flat-fielded, sky-removed, extracted, wavelength-calibrated, rebinned but not fluxed), including errors and quality flags;
- flux-calibrated spectrum (same as above but also fluxed), including errors and quality flags.

These products are combined into the final binary table FITS file which is the delivered main data product, with the wavelength scale as first column and all other products as further columns (see 'File Structure' below).

There is also an ancillary FITS file:

- 2D (not extracted but rectified) spectrum, *not flux-calibrated*, with the 2D information of the signal available for quality checks.

There are further ancillary files for each product:

- a text file with OB-related information about the product file, including OB classification and comments and QC information (Table 2);
- one or two (in the case of VIS arm) overview plots, displaying the spectrum, a smoothed version, the unfluxed version, and the SNR; for the VIS arm, the second graphical file contains an overview plot of all three arms.

---

<sup>12</sup> The pipeline also supports dynamic bad pixel maps derived from flats, their advantage being a closer time match, at the price of far less controlled quality.

Table 2. Content of ANCILLARY.README text file

| parameter               | values       | meaning   |
|-------------------------|--------------|---|
| OB related information: |              |   |
| SM_VM                   | SM or VM     | Data taken in Service Mode or Visitor Mode; VM data are less constrained in terms of OB properties, have no user constraints defined and therefore no grades (formally graded X meaning 'unknown')  |
| OB_GRADE                | A/B/C/D; X   | Immediate grade given by night astronomer, considering ambient conditions checked against user constraints  |
| OB_COMMENTS             | Free text    | Any optional comments added by the night astronomer, together with the <i>approximate</i> UT hh:mm (truncated after 200 characters). [Note that OBs might have been executed several times during the night, with or without comments. In those cases the user should always carefully check that the listed comment applies to the spectrum with the closest <i>previous</i> timestamp.] |
| QC related information: |              |   |
| QCFLAG                  | e.g. 0010010 | QC flag composed of 7 bits, see Table 4   |
| QC_COMMENT              | Free text    | Automatically added comment if a quality issue is discovered by the processing system (there are no human-provided comments)  |

All XSHOOTER spectra come separated by arm, like the raw data. Typically there are three spectra (from the UVB, VIS and NIR arm), but there are exceptions:

- in STARE mode, the number of input raw files, and therefore the number of output product files<sup>13</sup>, might be different from arm to arm;
- in all modes, it might have happened that a template was aborted, or the pipeline processing of one product failed, in which case less than three products are available.

The three products have essentially no spectral gap. The UVB product has the nominal signal truncated beyond 556nm, to suppress a spurious pseudo-absorption at 570nm arising from artifacts in the flat field (the suppression is controlled by the parameter `cut-uvb-spectrum=TRUE`).

**Rejected or failed processing.** Under the following conditions the pipeline processing always fails, and no data products exist<sup>14</sup>:

- NODDING data sets with only one input file;
- OFFSET data sets with no OBJECT frames;
- OFFSET data sets with no SKY frames.

The possible reasons for the existence of such datasets are manifold:

- Aborted templates (then the data are likely to be useless).
- Extended sources: sometimes observations of extended sources are made with the OFFSET template in a mapping mode, without OBJECT-SKY pairs; unfortunately the acquisition template then does not encode properly the information of the extended nature of the source in the headers, nor of the intended strategy of the observations.

<sup>13</sup> Remember that XSHOOTER STARE products are not stacked but come as one product per raw file.

<sup>14</sup> Such data could probably be processed interactively, e.g. with *Reflex*.

The proper reduction of these data would be possible with knowledge of the science case, which however is beyond the scope of this project.

Furthermore there are occasionally processing failures. A typical case is a high number of nodding input frames (20 or more) for which the pipeline sometimes, after long iterations, did not converge. No major attempts were made to understand and fix the situation, unless it was obvious.

Note that only in very rare cases we have rejected a product that was successfully created by the pipeline. Even in case of heavy saturation we have decided to deliver the product to the archive, since the saturated pixels are marked in the QUAL column (Table 5), and the unsaturated regions might still be useful. Also, products with large parts of negative flux have not been rejected. Instead the QCFLAGS have been set accordingly (see Section 'Data Quality', Table 4).

Only in the following cases we have rejected a product:

- the template has been aborted AND another issue showed up (e.g. saturation, or negative fluxes);
- the product column FLUX is entirely 0.

## Flux Calibration

One of the main improvements of the XSHOOTER pipeline over time was the flux calibration. Initially (before pipeline version 2.0) the response curves, as derived from almost nightly flux standard stars, had a poor algorithmic quality (e.g. uncontrolled splines) and were almost useless. With the review and improvements of version xshoo-2.x, these issues have been solved, and the response curves are of good quality and stability.

Nevertheless we decided against using nightly response curves. The main reason is that we are aiming at a *flux calibration*, but not at a *photometric calibration*. XSHOOTER data have been taken under conditions which were not photometrically controlled, and depending on the slit width used, they suffer from slit losses. Without the goal of a photometric calibration, the use of daily, close-in-time response curves would only be reasonable if instrument components were observed to vary on short timescales. This is however not the case.

We followed therefore the same scheme as for UVES and derived a set of *master response curves*. These are based on carefully compiled individual response curves. The selection criteria were:

- good transparency<sup>15</sup> (in order not to introduce additional bias from unstable atmospheric conditions),
- good algorithmic quality<sup>16</sup>.

In order to make use of the xshoo-2.x improvements, we started the compilation with data from 2013-01 and later. The master response curve for the NIR arm, averaged from all compiled response curves, and its +/- 10% envelope, are displayed in Figure 2.

We then took this master response curve and compared it to individual response curves from

---

<sup>15</sup> Defined by the +/-10% envelope of the best response curves, see Figure 2.

<sup>16</sup> Bumps and wiggles in the response curve are unacceptable if they do not correspond to instrument features but are due to imperfect records of the standard star energy distribution, or to algorithmic flaws.

the earlier epochs. Again the good (in the above sense) response curves were selected interactively<sup>17</sup> and averaged. That average, together with the +/-10% envelope, is plotted for the UVB arm in Figure 3. Then the existing master response curve was multiplied by a fudge factor (to account for differences in the normalization procedure for the master flats at that time), it is displayed as the blue line. It is obvious that adopting that master response curve (originally defined for the 2013 time range) also for the earlier epochs is possible within the +/-10% range. It has small systematic variations, possibly due to instrumental drifts (change of coating properties or flat-field lamp energy distribution) and possibly also to different pipeline versions, but it is well-defined in terms of spline robustness and also step size (in particular in the VIS and NIR telluric windows).

We have tested the validity of our approach with XSHOOTER observations of the flux standard star Feige 110. These data have been observed in NODDING mode, with the widest slit size 5", and have been processed with the corresponding science recipe, including the final step of the flux calibration with the master response curves for the three arms. A comparison of the flux calibrated XSHOOTER spectrum (which should in this case have photometric quality) to the tabulated energy distribution is reassuring (Figure 4). We did also a comparison to a flux-calibrated UVES spectrum of the same star (Figure 5). Again, the agreement is very good.

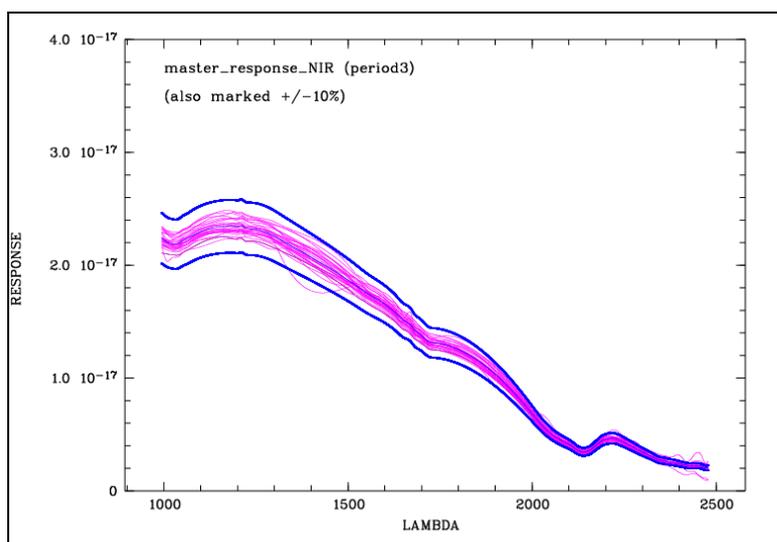


Figure 2. Selection of good response curves, and construction of master response curve. For the NIR arm, we show the selected individual response curves taken after 2013-01 (in purple), and the master response curve (thin blue line) derived from averaging them, with its +/-10% envelope in bold.

<sup>17</sup> Amounting to several hundred individual curves, per arm.

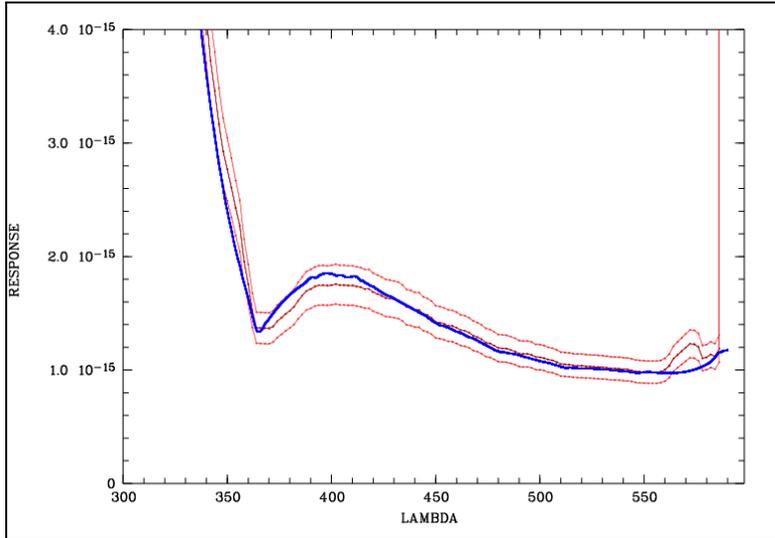


Figure 3. Propagation of master response curve back into 2009-2012. For the UVB arm, we show the average of all selected response curves from the pre-2013 period (plotted as thin red line), and its +/-10% envelope. The scaled master response curve from 2013 is overlotted in blue.

**Versions of master response curves.** We have identified several periods of validity for the master response curves, separated by breakpoints. One breakpoint occurred on 2013-01-15. It is related to the onset of using the pipeline versions xsh-2.x for the calibrations, in particular for the creation of the master flats. Those versions use a different normalization procedure than the versions xsh-1.x used before. Because both the science data and the standard stars (used for computing the response curves) are flat-fielded, the master response curve and the flat-fields used need to be aligned in terms of pipeline algorithms.

The second breakpoint applies to the NIR arm only and reflects the exchange of the NIR flat lamp, along with its significantly changed chromatic energy distribution.

Table 3. Versions of master response curves

| Period   | static master response curves                | end of period (“breakpoint”) defined by:  |
|--|--|---|
| 2009-10 (begin of operations) – 2013-01-15                           | UVB, VIS, NIR:<br>XS_GRSF_090930A_<arm>.fits | pipeline versions xsh-1.x, old normalization algorithm for master flats   |
| 2013-01-15 – now (for UVB and VIS);<br>2013-01-15 – 2013-11-05 (NIR) | XS_GRSF_130125A_<arm>.fits                   | upgrade to xsh-2.x, implementing a new normalization for the master flats, and a much better definition across telluric windows |
| 2013-11-06 – now (NIR)   | XS_GRSF_131106A_NIR.fits                     | exchange of NIR flat lamp, modified chromatic energy distribution   |

**Slit losses.** In some cases PIs have taken their spectra with both the wide (5”) slit (for photometry) and a narrow slit (for resolution). In these cases it is possible to measure the slit losses, for the prevailing seeing and transparency conditions.

Because of their photometric quality (at least with no slit losses), we have marked the wide-slit data with the quality bit 0 for good photometry, while in all other cases they are flagged as 1 for unknown photometric quality (depending on seeing, slit losses could still be negligible).

The flux-calibrated spectra are provided in units of  $\text{erg}/\text{cm}^2/\text{s}/\text{\AA}$ .

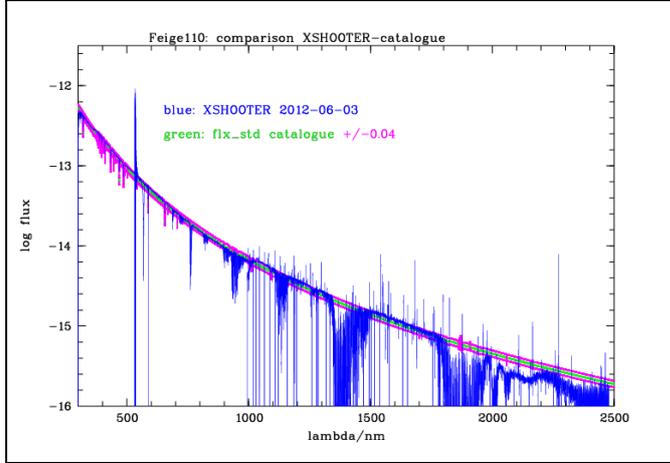


Figure 4. The XSHOOTER Feige 110 spectrum from 2012-06-03 (all three arms), processed with the appropriate master response curves and plotted in blue, compared to the tabulated energy distribution (in green, together with the 10% confidence range in purple which appears in the log plot as  $\pm 0.04$ ).

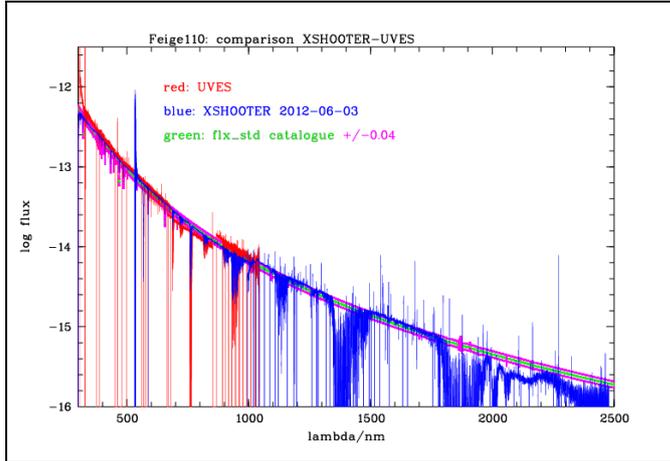


Figure 5. The same spectrum as above, compared to a UVES spectrum of Feige 110 overplotted in red (the UVES spectrum comes in several chunks and extends to about 1000nm). The green line is again the tabulated energy distribution.

## Data Quality

**Master calibrations.** All used master calibrations have been quality-reviewed and certified at the time of acquisition, as part of the closed QC loop with the Observatory which also includes trending<sup>18</sup>. The most important parameters for the quality of the data products are the SNR of the master flats, and the *rms* of the dispersion solution. The SNR of the master flats was always high enough to be dominated by the fixed-pattern (gain) noise, which is important to not compromise the SNR of the science data. The *rms* of the wavelength dispersion was lower in the first few years (with pipeline versions xsh-1.x) than later, due to a lower number of lines found.

SNR. There is a column “SNR” in the product table that is calculated from the signal and the corresponding error. It has no independent information but is provided for convenience. Its mean value is written as header key SNR. There are also the header keys

<sup>18</sup> Check out for more under the XSHOOTER link of [http://www.eso.org/qc/ALL/daily\\_qc1.html](http://www.eso.org/qc/ALL/daily_qc1.html).

HIERARCH.ESO.QC.FLUXn.SN (n=1...2 or 3) that describe the SNR in various spectral windows, defined in the comment of the key.

**SPEC\_RES.** The header key SPEC\_RES contains the nominal resolving power, as derived from the arclamp calibrations of the same slit width. The actual resolution of the science data has not been measured but could actually be higher, depending on seeing conditions and exposure time<sup>19</sup>. A better estimate would be available from the half-width of the telluric absorption lines.

**QC flag.** The header key "QCFLAG" in the XSHOOTER products describes automatically assigned quality flags. It is composed of seven binary bits. For each bit, the value 0 means "no concern".

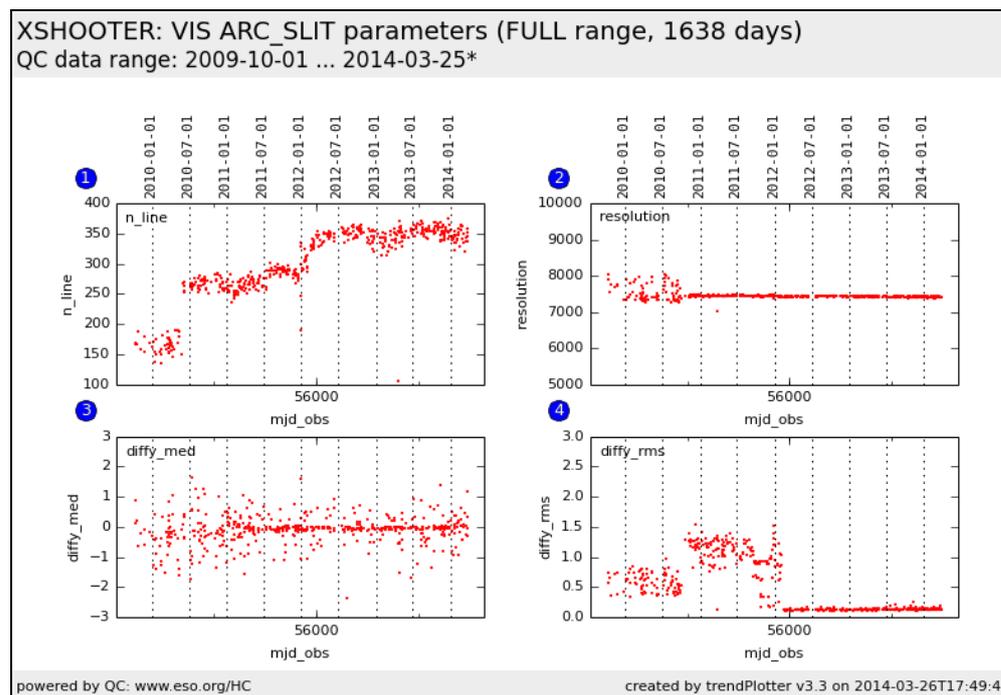


Figure 6. Evolution of the two QC parameters number of lines used for the dispersion solution (1), and rms (4), for the VIS arm<sup>20</sup>.

<sup>19</sup> For a point-like source, the actual resolution is between the value corresponding to the seeing disk, exposure-time integrated, and the value corresponding to the slit width.

<sup>20</sup> See [http://www.eso.org/qc/XSHOOTER/reports/FULL/trend\\_report\\_ARC\\_SLIT\\_time\\_VIS\\_FULL.html](http://www.eso.org/qc/XSHOOTER/reports/FULL/trend_report_ARC_SLIT_time_VIS_FULL.html) for the original plot, and replace VIS by UVB or NIR to check the other arms.

Table 4. QC flags.

| Bit                   | Content (if YES, value is 0, otherwise 1)                        | Motivation  | Header keys (HIERARCH ESO ...)                         |
|-----------------------|--|---|--|
| #1 - seeing           | seeing < slit width?   | flux losses if seeing disk truncated  | QC.SEEING = mean of TEL.FWHM.START and TEL.FWHM.END    |
| #2 - airmass          | below threshold value 1.8?                                       | higher probability of flux losses for higher airmass (if the ADC did not work properly)     | QC.AIRM.MEAN = mean of TEL.AMBI.START and TEL.AMBI.END |
| #3 - flux calibration | flux fully registered?   | 'yes' only if 5" slit used, otherwise always 'no'   | QC.SLITW   |
| #4 - mean counts*     | $\geq 0.1$   | If very small or negative $\rightarrow$ extraction went wrong, or just indicates low signal | QC.COUNTS.MEAN = mean of column FLUX_REDUCED           |
| #5 - mean SNR         | $\geq 0$   | If negative $\rightarrow$ extraction went wrong   | QC.SNR.MEAN = mean of column SNR                       |
| #6 - saturated pixels | number of saturated pixels below 1000 (UVB, VIS) or 20,000 (NIR) | quality issue if too many saturated pixels  | QC.NPIXSAT   |
| #7 - aborted template | TPL.EXPNO = TPL.NEXP?  | if not, data reduction is likely suffering, e.g. from upcoming clouds during observation    | TPL.EXPNO, TPL.NEXP                                    |

\* This is mean reduced counts, not flux.

The final QC flag is composed of all binary values. For instance, 0000000 is a pristine product, 1011100 is a product that might have some slit losses, and also has negative flux indicating a localization or extraction issue. The seeing check #1 is a rather coarse quality check and meant to be indicative only (the two header keys TEL.FWHM.START and ...END refer to the first raw file). The same is true for the airmass check (#2); the underlying values are also from the first raw file. Taken together, they indicate mainly how reliable the flux scale is. With #1 and/or #2 being 1, it becomes likely that the flux scale for spectra from the different arms may show jumps. Only if check #3 returns 0 the flux calibration is likely to be free from slit losses, but still not necessarily be of photometric quality since the transparency is not strictly controlled for XSHOOTER observations.

Flags #4 and #5 assess the extraction quality. They are not entirely independent, but not redundant either. Their underlying values are averaged across the whole spectral range. Flag #6 indicates possible saturation issues, while #7 is a technical indicator of template abortion, which might alert the user to unusual observing conditions that might explain abnormal product properties. Template abortion almost always indicates degradation of observational conditions, or instrumental problems, and results often in data sequences which are incomplete at least for good automatic processing, or violate quality assumptions of the pipeline. In case there were no quality issues discovered other than flag #7 being set, we have delivered the product to the archive. If flag #7 was found to be set, and another quality issue out of #4, #5 or #6 was found, we have decided to not deliver the product since these products were always found to be useless.

**Science products.** There has been some internal quality control on the pipeline processing of the science data, monitoring:

- the quality of the associations of calibration data (checking that the master calibrations used are not more than a few days away from the science data);
- score flags for various properties of the products, among them the number of saturated pixels (see above, Table 4);
- on-demand QC reports and quick-look overviews.

This information has largely been used to improve and fine-tune the reduction process. An individual one-by-one inspection of the products has not been done.

**Quality flags.** The XSHOOTER pipeline supports pixel-based quality flags (not to be confused with the QC flag that applies to the whole file), propagated through the entire calibration and reduction procedure. They come as co-added bit codes and are available per wavelength bin in the spectrum table as column “QUAL” (see Figure 7 below). The possible values for the bit codes are defined in the User Manual (sect. 11.3). Some important values are listed here:

Table 5. List of important quality flags

|                    |  |
|--------------------|--|
| $2^{12} = 4096$    | Pixel saturation (UVB or VIS)                        |
| $2^{19} = 524288$  | Missing data   |
| $2^{20} = 1048576$ | Extrapolated flux in NIR                             |
| $2^{21} = 2097152$ | Raw pixel value zero or negative (saturation in NIR) |
| $2^{22} = 4194304$ | Interpolated flux during standard extraction         |



Figure 7. Quality flags in the 2D product of the NIR arm. The colour map has been chosen to display bits  $2^{20}$  (extrapolated flux) and  $2^{21}$  (raw pixel zero or negative, white patches).

The logarithm of the quality flags is plotted in blue as lowest panel in the preview plots, labeled “log Q”<sup>21</sup>.

**Previews.** The preview plots have been originally developed as quick-look plots for process quality control. It was felt that they might also be useful to the archive user. They are delivered as ancillary files along with the main products. There are two plots:

<sup>21</sup> With bit  $2^{22}$  being suppressed in the plots (but not in the data) in order to avoid the plots being swamped.

1. the main preview plot (Figure 8), one per arm;
2. the overview plot (Figure 9), only for the VIS arm.

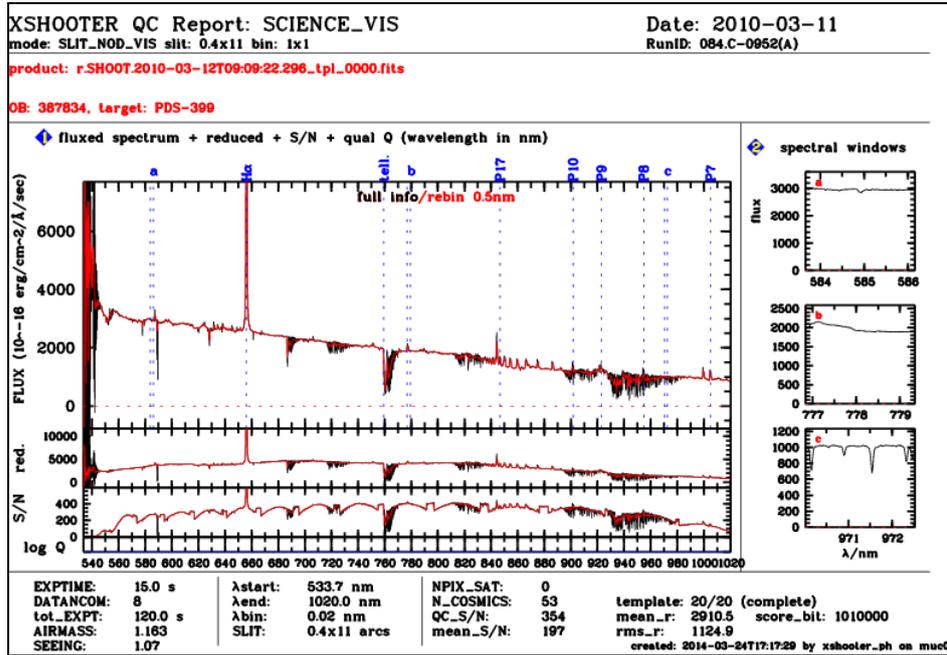


Figure 8. Main preview plot, featuring: 1. from top to bottom the flux-calibrated spectrum (column FLUX, both at original resolution in black and as smoothed version in red); the unfluxed spectrum (column FLUX\_REDUCED); the SNR; log Q where Q is the pixel quality flags; 2. small spectral windows at full resolution; 3. a set of related QC parameters, bottom; 4. labels for identification (top).

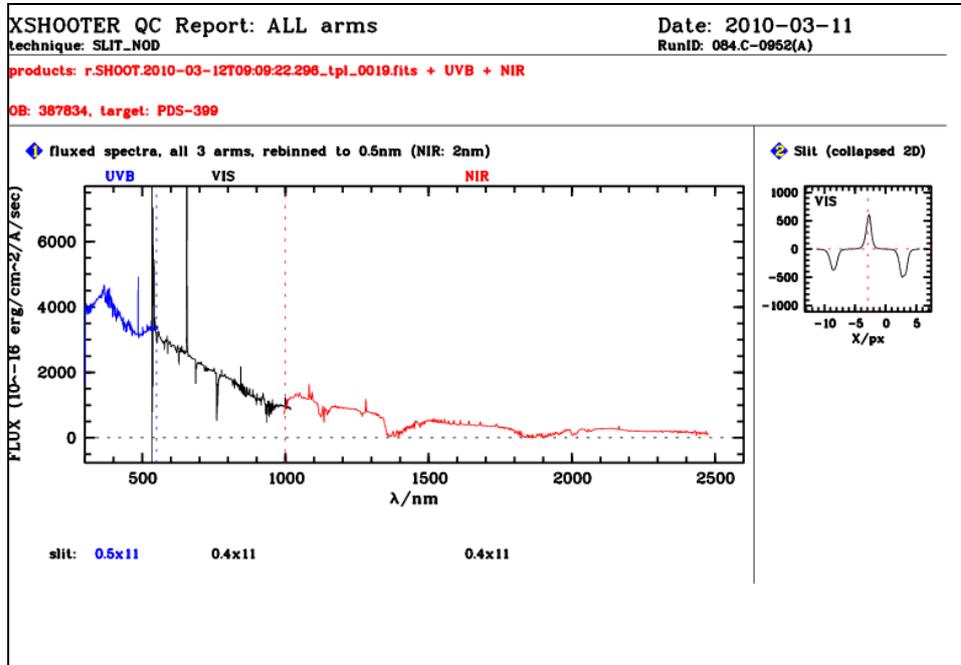


Figure 9. Second overview plot, featuring the (smoothed) signal in all three arms (1), and the collapsed signal in cross-dispersion direction, as derived from the 2D product (2). This plot can be used to check the flux scale (effect of slit losses) and the cross-dispersion profile. It also has the slit widths labelled.

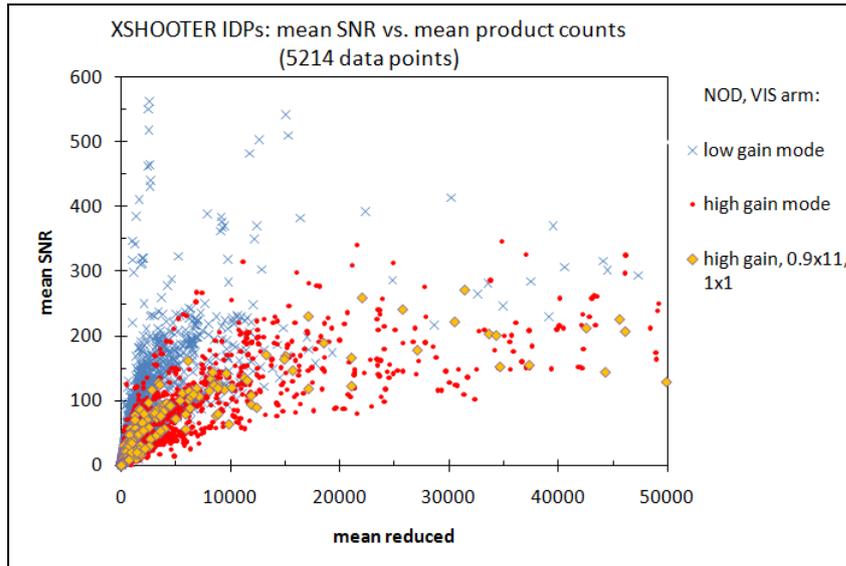


Figure 10. Mean SNR vs. mean reduced spectrum, for all NODDING products of the VIS arm (a total of 5214 data points between 2009-10-01 and 2013-12-31). We distinguish between data for the high-gain mode (the “standard” mode), the low-gain mode (in both cases all binnings and slits), and high-gain mode, 1x1 bin, 0.9x11 slit (the most frequently used setting). The data plotted in this figure are accessible under the URL given below.

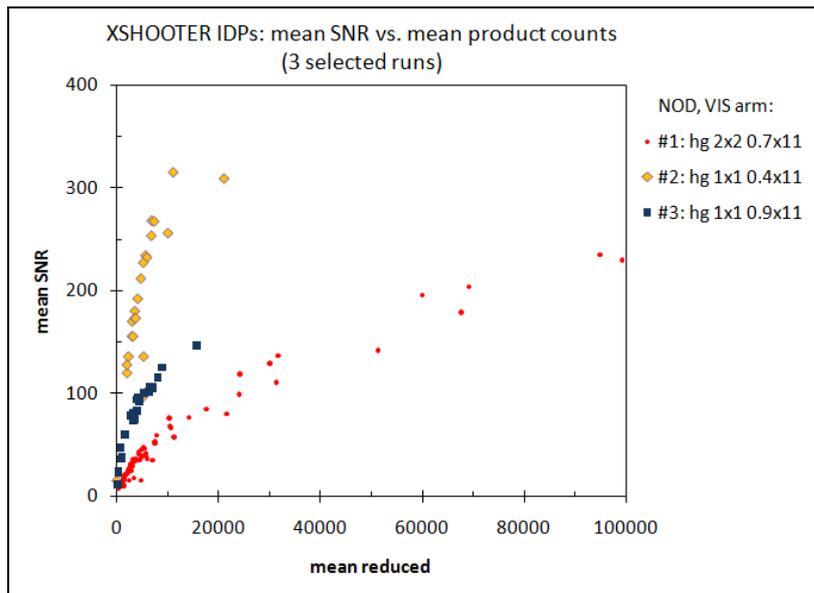


Figure 11. Same as Figure 10, for three selected runs (again NODDING products from the VIS arm only). Runs #2 and #3 have delivered data for young stellar objects (panel C), while run #1 belongs to panel D (stellar evolution). The data plotted in this figure are accessible under the URL given below.

**Process quality control.** The quality of the data reduction is monitored with quality control (QC) parameters, which are stored in a database. The database is publicly accessible through a browser and a plotter interface<sup>22</sup>.

QC parameters are used to monitor the reduction quality. The most obvious check is the SNR versus signal control plot (the signal being expressed as the mean across the entire reduced spectrum, before flux calibration, and the SNR being the mean over the entire spectral range).

<sup>22</sup> Browser: [http://archive.eso.org/qc1/qc1.cgi?action=qc1\\_browse\\_table&table=xshooter\\_science\\_public](http://archive.eso.org/qc1/qc1.cgi?action=qc1_browse_table&table=xshooter_science_public);  
 plotter: [http://archive.eso.org/qc1/qc1.cgi?action=qc1\\_plot\\_table&table=xshooter\\_science\\_public](http://archive.eso.org/qc1/qc1.cgi?action=qc1_plot_table&table=xshooter_science_public).

An example for NODDING, VIS arm is displayed in Figure 10. The blue crosses represent the low gain mode which is often used to obtain very high SNR of bright targets by combining many input spectra. For that mode, the record SNR found so far is in excess of 1000, quite remarkable for a product that has been automatically pipeline-processed without any fine-tuning. The red filled circles represent the “workhorse” high-gain mode, which is able to deliver SNR of up to 300 or more. The spread in the achieved SNR for a given value of *mean\_reduced* is likely to come from the spectral slope of the products. This is illustrated by the next figure which displays these parameters for three selected observing runs. Their SNR slopes are well confined, due to their targets having roughly the same spectral slopes.

## Known features and issues

This is a non-exhaustive list which might evolve with time. Please check also Sect. 6 of the Pipeline User Manual and Sect. 7.6 of the Reflex Tutorial<sup>23</sup>.

## Issues

**Localization and extraction.** Sometimes STARE data might have the object off-center, with the effect that sky and target get confused by the pipeline which uses pre-defined localization and extraction windows (see Figure 12). The spectrum then has negative values<sup>24</sup>. The method used for localization of STARE targets is MANUAL which is the most robust one, but sometimes the wrong choice. Check the User Manual for more information.

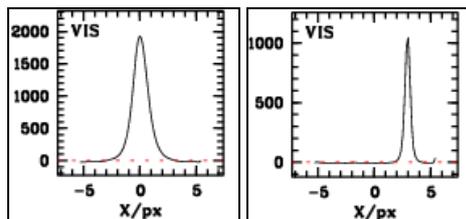


Figure 12. Cross-dispersion profile (all examples are cut out from the second overview plot), collapsed in X direction. Both profiles come from the STARE mode. Left: target is properly centred, no issue with localization and extraction. Right: Source is off-center (center being at 0), pipeline creates a negative spectrum by confusing sky and target. The difference in FWHM is caused by seeing.

For NODDING and OFFSET data the extraction method assumes a point source. If true, the cross-dispersion profile is well-defined as a single positive signal and two correlated negative signals (Figure 13 a,b). Quite some spectra actually contain complex sources (multiple targets, complex background, extended sources, Figure 13c). This is the main source for abnormal spectra (negative flux, negative SNR). *The pipeline does not recognize these situations, and the user should always carefully check the 2D spectra in case of doubts.*

On the other hand the pipeline can safely extract spectra without continuum (from an emission-line object), with a cross-dispersion profile in Figure 13d. Such profile is not unusual.

<sup>23</sup> <http://www.eso.org/sci/software/pipelines/>, go to ‘XSHOOTER Reflex Tutorial’.

<sup>24</sup> In those cases, it might happen that the extracted spectrum is quite useful after correcting for the wrong sign.

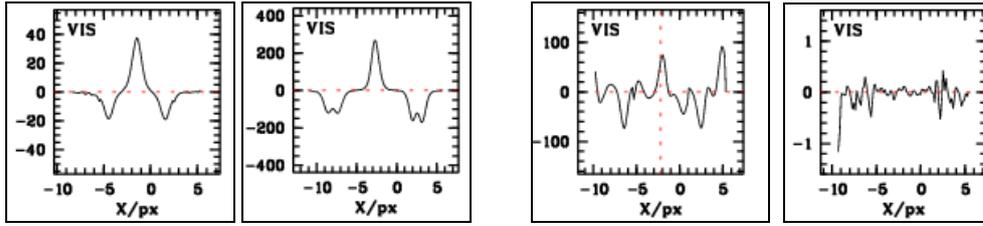


Figure 13. Cross-dispersion profile in NODDING mode. From left to right: a) the target is properly centred and well-behaved. The two negative signals come from the nodding pattern. b) The target is properly centred and well-behaved. The negative peaks appear double reflecting a jittered NODDING pattern. c) Bad profile shape, useless extraction. Possible reasons are: complex background, invalid NODDING pattern, extended/multiple sources. d) No continuum signal, but extraction looks ok and spectrum likely to be valid (from an emission-line object).

OFFSET data depend even more critically on the observer's definition of the Observing Block (Figure 14). The pipeline blindly trusts the labels OBJECT and SKY in the raw data. The user should always check carefully if the OFFSET products have a cross-dispersion profile like in Figure 14 a,b (well behaved) or e.g. in c (ill-defined). Remember that OFFSET data without OBJECT, or without SKY, are suppressed.

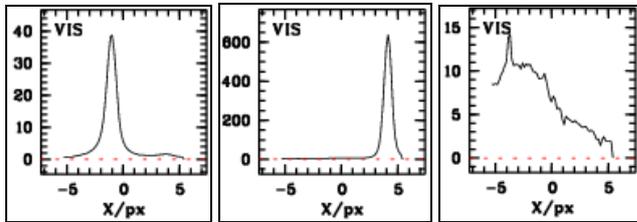


Figure 14. Cross-dispersion profile in OFFSET mode. a: proper behaviour (object and sky well-defined). b: target off-centre, the extraction still works fine. c: odd behaviour (object and/or sky not well defined).

It is not possible to tell from the header if the source is point-like or not. Furthermore it is impossible to check whether the OBJECT and SKY labels are correctly set by the PI. *In case of doubt, the user should always check the 2D ancillary files and the VIS QC plot displaying the cross-dispersion profile.*

**Saturation and gaps.** Saturated pixels in the raw data get ignored by the pipeline. If there are too many, so that no unsaturated pixels can be found by the pipeline for a given wavelength bin, the flux in this wavelength range is set to zero. In the QUAL extension of the 2D ancillary spectra, these regions can be easily spotted (the saturated pixels have the bit-code 4096 for "saturated pixels"). In the extracted main output file the QUAL column has the bit-code  $2^{19}=524288$  ("missing data") (see Figure 15). Outside of these gaps, the data might still be useful.

**APERTURE key filled wrongly.** Due to a software bug, the APERTURE key in the products is filled with the slit length (always 11 arcsec) instead of the slit width.

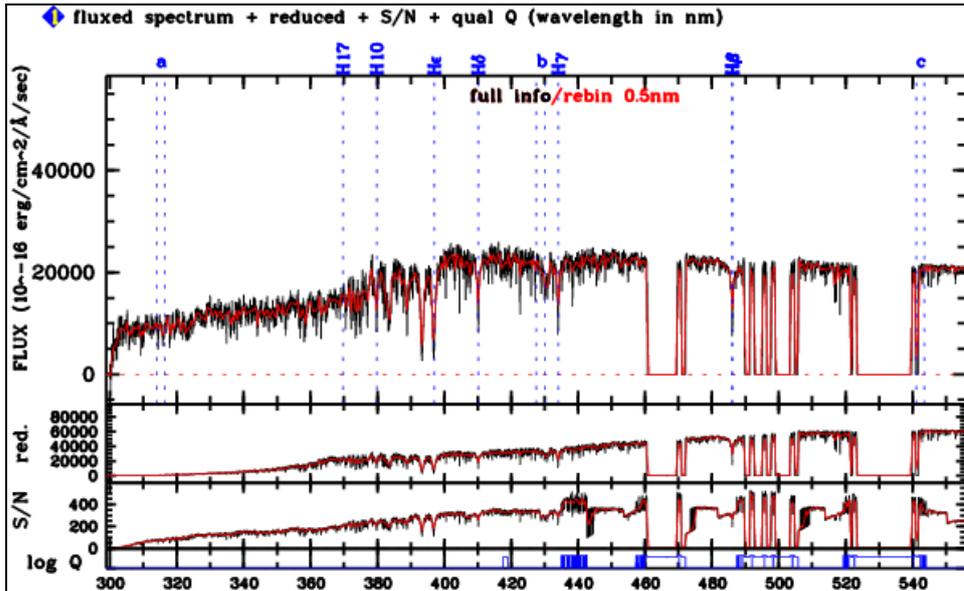


Figure 15. Spectral gaps due to saturation. They are marked by the quality flag  $2^{19}$  (blue in lowest panel of the QC plot).

In the NIR saturated raw data pixels might have negative pixel values. Affected spectral pixels are flagged by bit  $2^{21} = 2097152$  (see Figure 16), and the impact on the spectrum are troughs embedded between peaks (unsaturated regions).

**Negative flux.** See “Localization and extraction” section for possible origins of negative fluxes in the spectra. In the NIR, negative fluxes might appear in raw data and are the result of saturation (Figure 16). Also, it might happen in rare cases that the reset anomaly causes negative pixels which then are perfectly valid, except for the wrong sign.

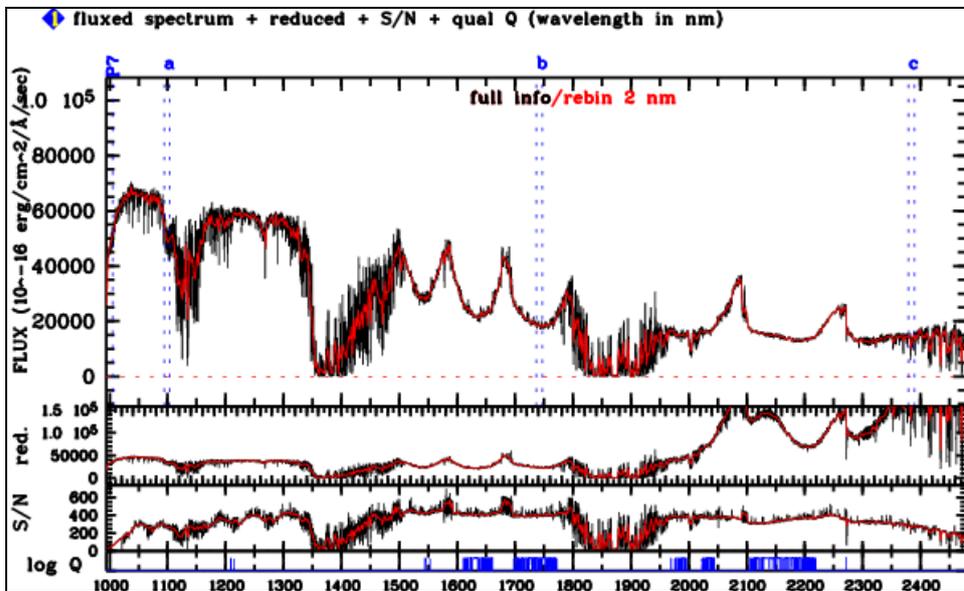


Figure 16. Spectral regions affected by negative (saturated) raw pixels in NIR spectra. The affected regions are visible as artificial depressions and flagged blue in the lowest panel of the QC plot.

**Wrong OB grades in ancillary text files.** If in Service Mode an OB is executed twice (or in general more than once) during the same night, this is typically done because during the first attempt the ambient conditions unexpectedly degraded, resulting in a C grade. A second attempt might then be made, ideally resulting in a B or A grade. In such a case, the grade (as

given in the ancillary text file of the product) is always recorded from the last execution. This is wrong in the typical case of a grade C-A pair and due to a bug in the script. The grade as retrieved from the nightlog tool NLT is correct. For repetitions in different nights this bug does not appear, and the quoted grades are correct.

## Features

**Pick noise.** At certain times (e.g. during most of 2010-03) the VIS arm detector showed a strong pick noise pattern that the pipeline cannot remove from the data. The impact is a high-frequency noise that is easily spotted in the spectral windows plot (2). See an example in Figure 17.

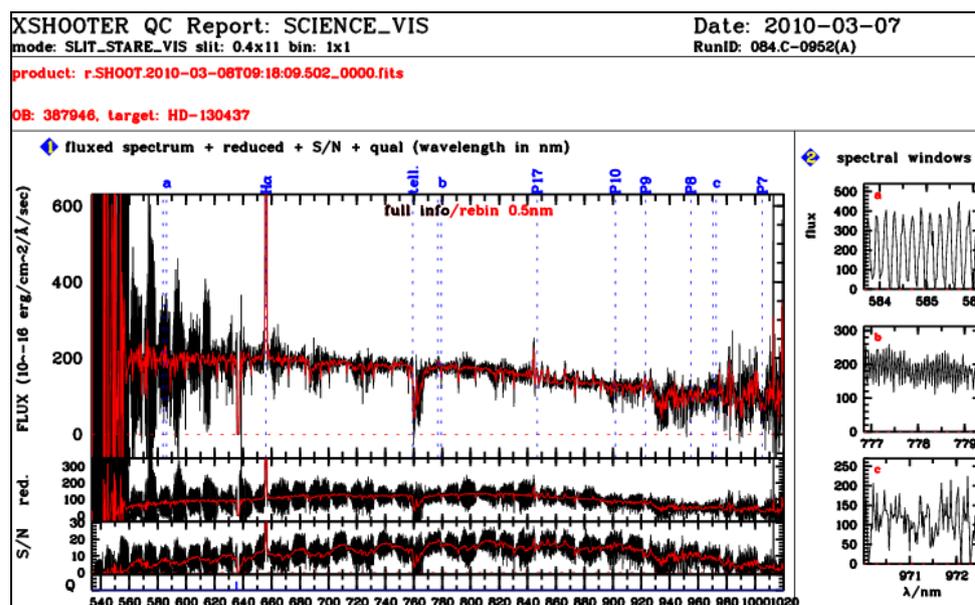


Figure 17. Pick noise in VIS data, which stands out prominently in the close-up plots.

**Steps at begin of order.** Occasionally there are a few steps at the begin of an order, apparently induced by an imperfect flat-fielding (Figure 18).

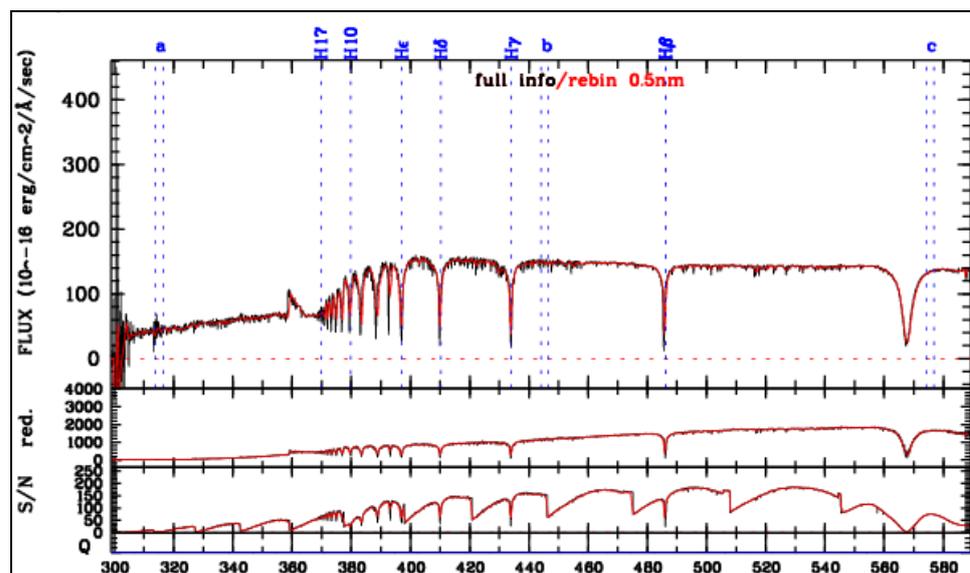


Figure 18. Steps at begin of an order. In this example the feature at 360nm is rather pronounced. Such features appear at the begin of an order (the orders are best visible in the S/N panel).

**2D extracted spectrum not flux-calibrated.** The ancillary 2D file (name starts with XS\_SRE2, product category is SCI\_SLIT\_MERGE2D\_<arm>) is not flux-calibrated although such a product would be useful and would be created by the pipeline. There is no particular reason why that product was added instead of the flux-calibrated 2D product, except for that it was assumed that this product would be of no general interest and useful only for QC purposes (like checking where the signal is relative to the slit geometry). If a user wishes to have a flux-calibrated version of the 2D file, he should calculate the ratio of the columns :FLUX (the flux-calibrated 1D signal) and :FLUX\_REDUCED (the uncalibrated 1D signal). That ratio function should then be expanded into a 2D file and get multiplied into the SCI\_SLIT\_MERGE2D file, resulting in a flux-calibrated 2D spectrum.

**Intensity jump at 2.25  $\mu$ .** A strong sky background in the K band of the NIR arm can result in a jump of the extracted spectrum in particular for low-S/N spectra acquired in STARE mode, at 2.25  $\mu$ . This feature does not occur at high S/N, or for spectra acquired in NODDING mode.

Find more documentation about features and issues on-line:  
<http://www.eso.org/qc/PHOENIX/XSHOOTER/processing.html>

## Data Format

### Files Types

The primary XSHOOTER Echelle product is the flux-calibrated spectrum, in binary spectroscopic data format:

| ORIGFILE names starting with | product category                                 | Description                                   |
|------------------------------|--|---|
| XS_SFLX                      | HIERARCH.ESO.PRO.CATG<br>SCI_SLIT_FLUX_IDP_<arm> | flux-calibrated product (arm=UVB, VIS or NIR) |

The primary product has an ancillary FITS file delivered with it (useful for quality assessment; in 2D image format):

|         |                        |  |
|---------|------------------------|--|
| XS_SRE2 | SCI_SLIT_MERGE2D_<arm> | Order-merged 2D product before extraction and flux calibration (arm=UVB, VIS or NIR) |
|---------|------------------------|--|

The following naming convention applies to the ORIGFILE product name (the ancillary FITS file has the same name, with XS\_SRE2 replacing XS\_SFLX): e.g. XS\_SFLX\_922346\_2013-08-09T23:33:54.611\_S1.5x11\_1x1\_VIS\_NOD.fits has the components:

| ORIGFILE component | XS       | SFLX  | 922346 | 2013-08-09T23:33:54.611              | S1.5x11_1x1_VIS_NOD.fits  |
|--------------------|----------|---|--------|--------------------------------------|---|
| refers to ...      | XSHOOTER | product type (SFLX where S stands for science and | OB ID  | timestamp of first raw file archival | setup string: S1.5x11 for the slit; 1x1 for the binning (dropped in NIR); |

|                    |    |   |        |                         |   |
|--------------------|----|---|--------|-------------------------|---|
| ORIGFILE component | XS | SFLX                                    | 922346 | 2013-08-09T23:33:54.611 | S1.5x11_1x1_VIS_NOD.fits                |
|                    |    | FLX for fluxed, or RE2 for reduced, 2D) |        |                         | VIS for the arm; NOD for the technique. |

The ancillary files (always delivered with the primary 1D spectrum) have the following ORIGFILE names:

Table 6. Naming conventions of ANCILLARY files

| type                 | example   | rule  |
|----------------------|---|---|
| ANCILLARY.2DSPECTRUM | XS_SRE2_998129_2013-09-26T08:49:39.394_S5.0x11_1x1_UVB_STA.fits | Same as primary spectrum, starting with XS_SRE2 (for science, reduced 2D)   |
| ANCILLARY.PREVIEW    | r.XSHOO.2013-09-26T07:56:43.243_tp1_0000.fits_1.png             | Technical filename of primary spectrum, with _1.png appended; the VIS products have also a second preview file, called _2.png |
| ANCILLARY.README     | XS_SFLX_998167_2013-09-26T07:56:46.364_S0.6x11_NIR_NOD.txt      | Same as primary spectrum, with fits replaced by txt   |

The user may want to read the ORIGFILE header key and rename the archive-delivered FITS files.

## File structure

The primary XSHOOTER product XS\_SFLX comes as binary FITS table in multi-column format. The columns are labeled as follows:

Table 7. Internal structure of the XSHOOTER spectrum.

| column | label        | content   |
|--------|--------------|---|
| #1     | WAVE         | wavelength in nm  |
| #2     | FLUX         | extracted, wavelength-calibrated, sky-subtracted, flux-calibrated SCIENCE signal in physical units [ $\text{erg s}^{-1} \text{cm}^{-2} \text{\AA}^{-1}$ ] |
| #3     | ERR          | Error of FLUX (same units)  |
| #4     | QUAL         | Quality flag  |
| #5     | SNR          | Signal-to-noise ratio = FLUX/ERR  |
| #6     | FLUX_REDUCED | extracted, wavelength-calibrated, sky-subtracted, but not fluxed SCIENCE signal in counts   |
| #7     | ERR_REDUCED  | corresponding error (not fluxed)  |

The difference between FLUX and FLUX\_REDUCED is the flux calibration. The FLUX\_REDUCED data might become useful if the user wishes to apply his own response curve instead of the master response curve. The SNR column is provided for convenience. The QUAL column contains the quality flag per wavelength bin, propagated throughout the reduction.

## File Size

The (unbinned) XSHOOTER products have about 1.5 MB size. The ancillary 2D files have the same spectral coverage and come as 15-29 MB files (depending on arm). Files are always uncompressed.

## Acknowledgment text

According to the ESO data access policy, all users of ESO data are required to acknowledge the source of the data with an appropriate citation in their publications. Find the appropriate text here<sup>25</sup>.

All users are kindly reminded to notify Mrs. Grothkopf (esodata at eso.org) upon acceptance or publication of a paper based on ESO data, including bibliographic references (title, authors, journal, volume, year, page-numbers) and the programme ID(s) of the data used in the paper.

---

<sup>25</sup> <http://archive.eso.org/cms/eso-data-access-policy.html>